


14. Reverse the removal steps to install the front fender.

## HEADLIGHT GRILL

### Removal/Installation



1. Remove the headlight housings as described in the *Headlight Lens* section in Chapter Nine.
2. Remove the mounting screws and retaining clips.
3. Remove the headlight grill.
4. Reverse the removal procedure to install the headlight grill.

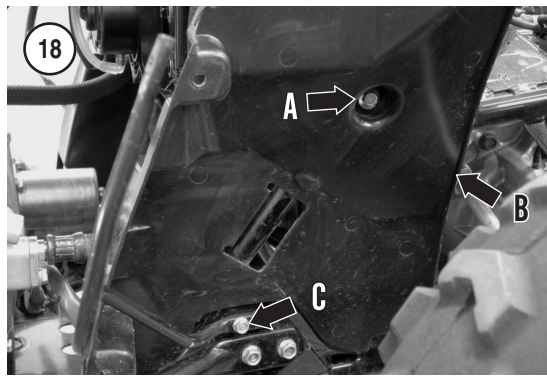

## REAR CARRIER

### Removal/Installation

1. Park the ATV on level ground and set the parking brake.
2. Remove the bolts (A, **Figure 19**) securing the rear fender to the carrier on each side.
3. Remove the bolts (B, **Figure 19**) securing the rear carrier to the frame on each side.
4. Remove the rear carrier (**Figure 20**).
5. Install the rear carrier by reversing the preceding removal steps.

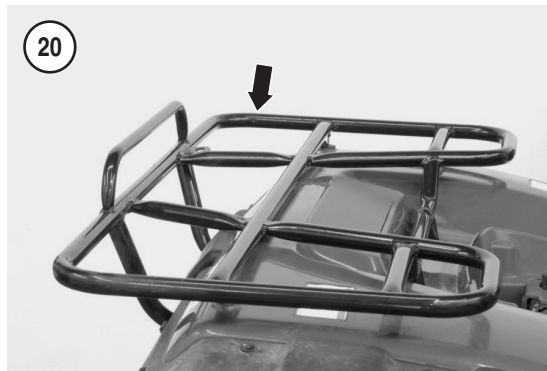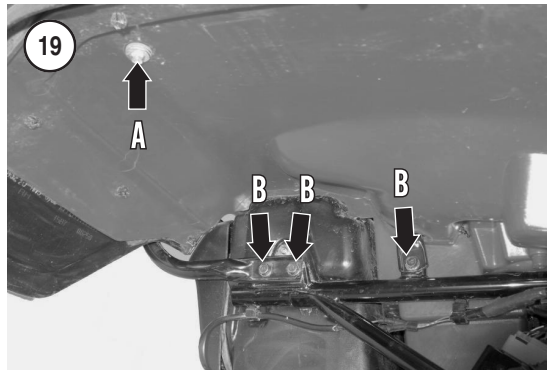

## REAR FENDER

### Removal/Installation

1. Park the ATV on level ground and set the parking brake.
2. Remove the rear carrier as described in this chapter.
3. Remove the battery (Chapter Three).

Copyright of Honda TRX350 RANCHER, 2000-2006 is the property of Penton Media, Inc. ("Clymer") and its content may not be copied or emailed to multiple sites or posted to a listserv without the copyright holder's express written permission. However, users may print, download, or email articles for individual use.